

LS 9 V

Primary lithium battery

Primary lithium-thionyl chloride (Li-SOCl₂) high energy density battery pack.

A prismatic battery pack for a wide range of applications requesting low base currents combined with superimposed pulses. The LS 9 V version yields good voltage readings in a wide T range (-60°C to +85°C).

Main applications

- Memory back-up
- Alarm and security devices
- Smoke detectors
- Alarm equipment
- Industrial electronics
- Medical equipment

Key features

- Pack assembled from three ½ AA-sized (and UL-recognized) cells connected in series
- Component cells with stainless steel container and hermetic glass-to-metal sealing
- Plastic sleeve for battery housing
- Miniature snap-on terminals
- Non-flammable electrolyte
- Non-restricted for transport

Benefits

- High voltage, stable during most of the application's lifetime
- Wide operating temperature range
- Low self-discharge rate (less than 1% per year of storage at +20°C)
- Easy integration into compact systems

Storage

- The storage area should be clean, cool (preferably not exceeding +30°C), dry and ventilated.

Warning

- Fire, explosion and burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C (212°F), incinerate, or expose contents to water.
- Do not solder directly to the battery pack.




Pack construction	3 LS 14250 in series
Pack designation	LS 9 V
Part number	0095-567-019
Electrical characteristics*	
Nominal capacity (at 1 mA, +20°C, 6.0 V cut-off. The capacity restored by the battery pack varies according to current drain, temperature and cut-off)	1.2 Ah (1.0 mA)
Open circuit voltage (at +20°C)	11.0 V
Nominal voltage (at +20°C and 0.1 mA)	10.8 V
Pulse capability: typically up to (0.1 second pulses, drained every 2 mn at +20°C from undischarged cells with 10 µA base current, yield voltage readings above 9.0 V. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult Saft)	100 mA
Maximum recommended continuous current (Higher currents possible, consult Saft)	35 mA
Storage (recommended) (For more severe conditions, consult Saft)	+30°C (+86°F) max
Operating temperature range (Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult Saft)	-60°C/+85°C (-76°F/+185°F)
Typical weight	29 g (1 oz)
Lithium metal content	approx. 0.9 g

* Typical values relative to cells stored for one year or less at +30°C max.




SAFT

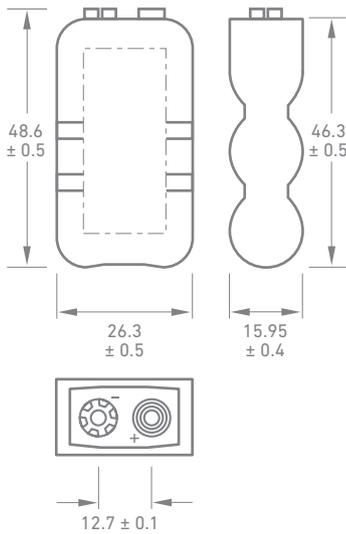


Dimensions in mm.


Voltage plateau versus current and temperature (at mid-discharge)

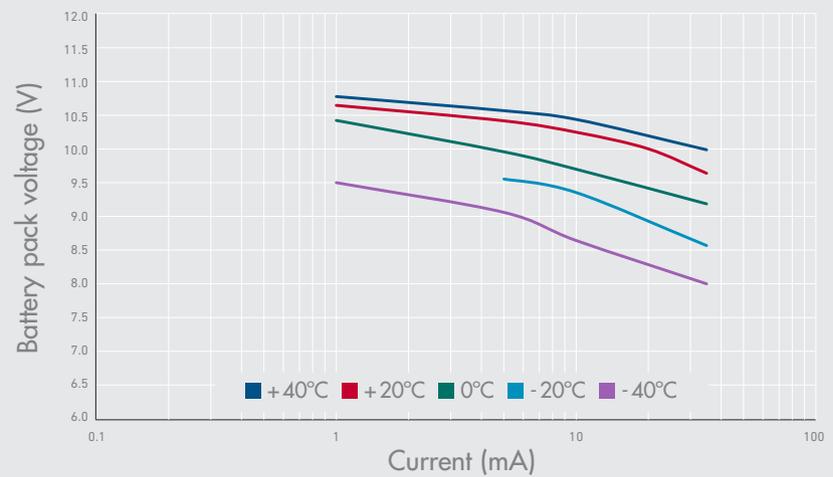

Typical discharge profile at +20°C

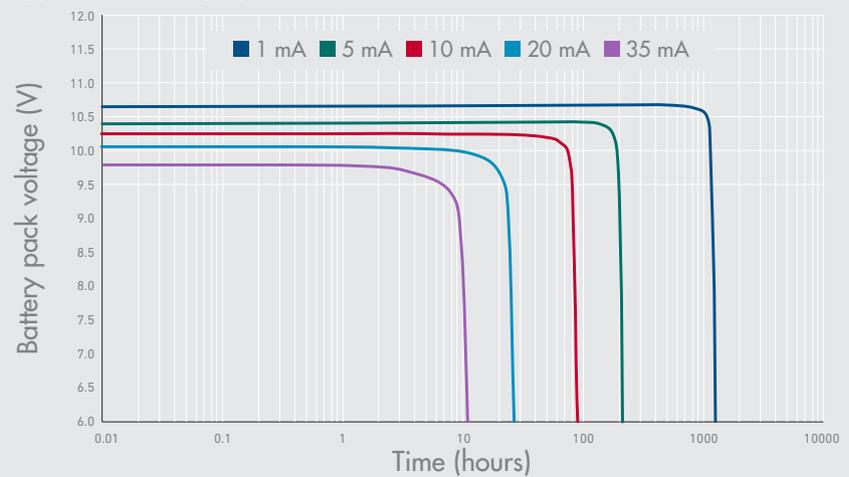

Restored capacity versus current and temperature (6.0 V cut-off)

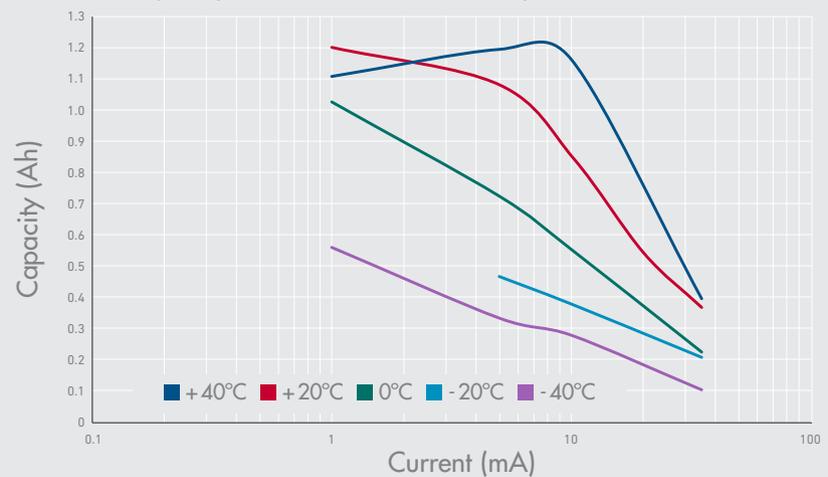

Saft
 Specialty Battery Group
 12, rue Sadi Carnot
 93170 Bagnolet - France
 Tel. : +33 1 49 93 19 18
 Fax : +33 1 49 93 19 69
 www.saftbatteries.com

Doc No.: 31080-2-0214

Edition: February 2014

Information in this document is subject to change without notice and becomes contractual only after written confirmation by Saft.

For more details on primary lithium technologies please refer to Primary Lithium Batteries Selector Guide Doc No 31048-2.

Published by the Communications Department.

Photo credit: Saft

Société par Actions Simplifiée au capital de 31 944 000

RCS Bobigny B 383 703 873

Produced in the UK by Arthur Associates Limited